

Yealink


Triple Modes

H.323/SIP

⊕ Zoom Room
USB BYOD

MeetingEye500

New generation video conferencing system

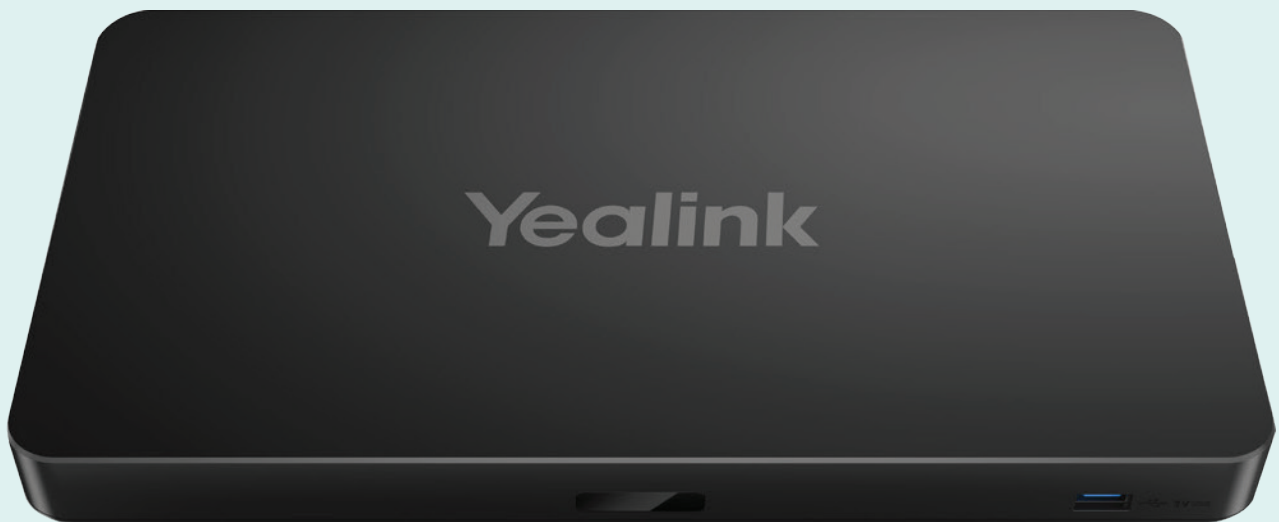

Three-screen
Display



4K Video
Calling



Multi
Camera



One-line
Deployment



BYOD
Device Mode

Separate design, adaptable to various types of meeting rooms

MeetingEye500은 다양한 유형의 회의실을 위해 설계된 화상회의 코덱이자 Zoom 어플라이언스 룸시스템입니다.

MeetingEye500은 유니버설하게 사용할 수 있는 화상회의 룸시스템입니다. 레가시 화상회의의 엔드포인트로 다자간 화상회의 솔루션(MCU)에 등록하여 사용할 수 있음은 물론, 일대일 H.323/SIP 화상회의도 가능합니다. 더불어 Zoom Room이 탑재되어 Zoom 화상회의 룸시스템에 특화된 모든 기능을 사용할 수 있습니다. 또한 BYOD 디바이스 모드를 통해서 Teams, WebEx, Google Meet 등 PC/노트북 상의 모든 화상회의를 할 수 있으므로 MeetingEye500은 명실상부하게 시대가 원하는 유니버설 룸시스템이라고 말할 수 있습니다. MeetingEye500은 4K UHD의 고화질의 화상회의와 콘텐츠 공유를 지원하며, HDMI 비디오 입력 포트가 있어 범용 타사 카메라 사용도 가능합니다.

3개의 HDMI 비디오 출력 포트를 통한 몰입감 있는 화상회의!

MeetingEye500은 3개의 HDMI 비디오 출력 포트를 지원하여 최대 3대의 디스플레이를 통한 4K 고화질 화상회의가 가능합니다.
3대의 디스플레이를 통해 로컬+원격지 참가자+공유자료를 디스플레이 할 수 있어 몰입감 있는 화상회의를 제공합니다.



BYOD Device Mode

여러분의 PC 또는 노트북으로 PC 화상회의도 가능합니다.



편리한 무선 자료 공유

Airplay, Miracast, 및 WPP20을 연결하여 무선으로 쉽고 빠르게 자료를 공유할 수 있습니다.



AirPlay



Miracast




Yealink WPP30


표준랙 장착 가능 & PoE 지원

쉽고 간편하게 하나의 케이블로 카메라와 악세서리를 연결할 수 있습니다.

MeetingEye500 설치




기존 설치 방식




다양하고 효율적인 배치

탈부착이 가능한 디자인으로 월 마운트, 테이블 위/아래, 캐비닛 위 등 원하는 곳에 유연하게 배치할 수 있어 보다 자유로운 공간 활용이 가능합니다.

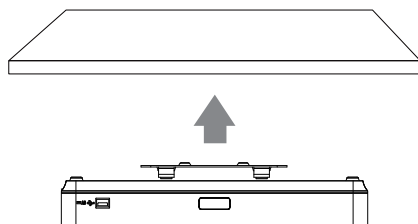

역상 설치 가능



표준 랙 설치 가능

다양한 악세서리 활용



4K PTZ 카메라
UVC84



듀얼 4K 추적 특화 카메라
UVC86



PTZ 카메라
3rd Party HDMI 카메라




터치패드
CTP18



유선 자료 공유 & 디바이스 모드
VCH51



스피커
CP965



무선 자료 공유 & 무선 디바이스 모드
WPP30



유선 마이크
VCM34



유선 마이크
VCM35



유선 천장형 마이크
VCM38




무선 마이크
VCM36-W



유선 마이크
MSpeaker-II

연결 구성 예시

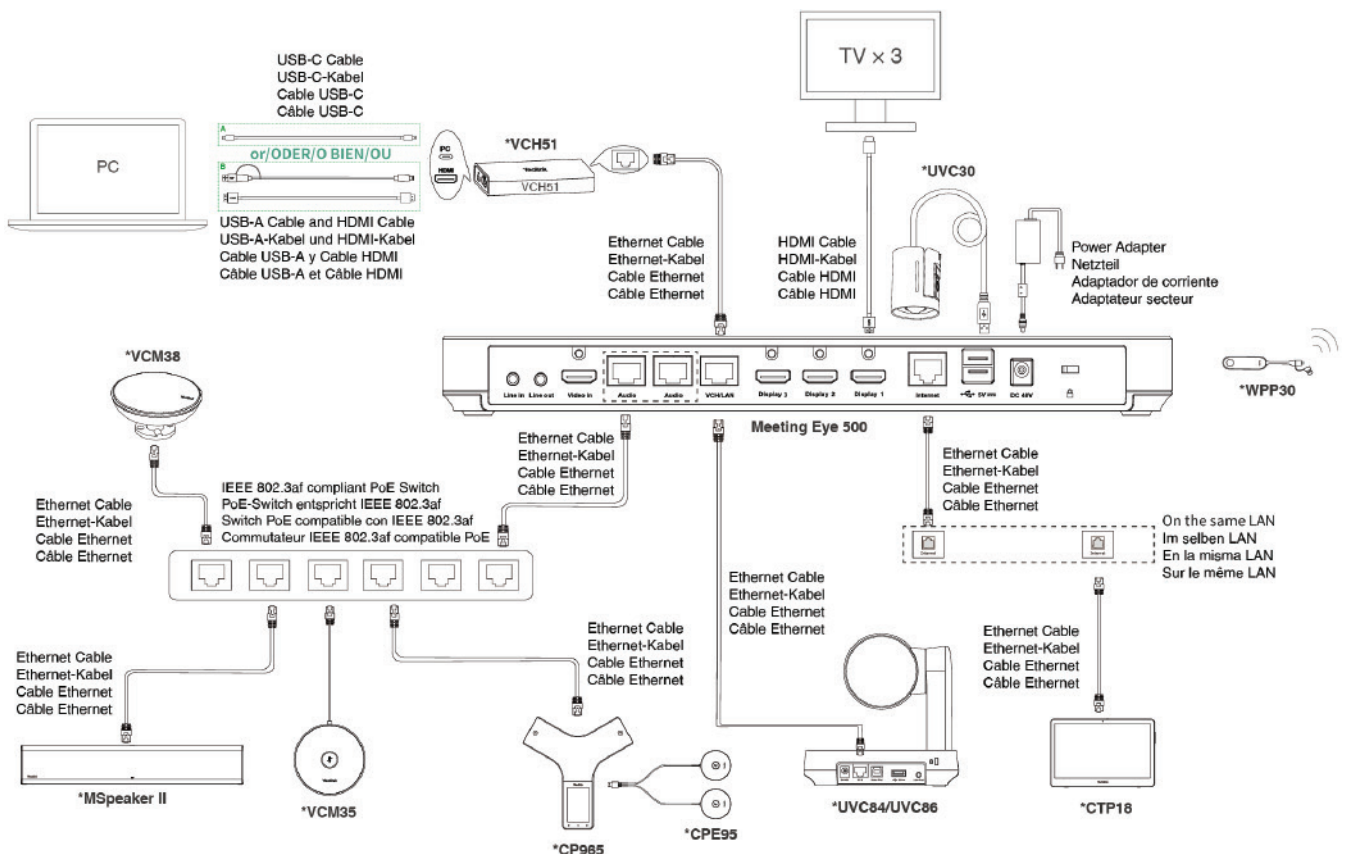

MeetingEye500 사양표

Video Specifications • Content Video: Up to 4Kp30 • Content Sharing: Up to 4Kp30 • Content Video and Content Sharing: Up to 4Kp30 video + 4Kp15 sharing • Video packet loss resistance: 50% Camera • Camera: Optional UVC30 (only supports display picture, does not support configuration and control)/UVC84/UVC86 • Third-party cameras: support Audio Device • Microphone: Optional VCM35/VCM36-W/VCM38 or third-party devices • Conference Phone: Optional 1 CP965 as a sound pickup and playback device, optional 1 pair (that is, two, inseparable) CPE95 to use with CP965 • Speaker: Optional MSpeaker II or third-party devices Accessories • Content Sharing Device: Optional WPP30 Wireless Presentation Pod/VCH51 Video Conferencing Hub(including BYOD) • Bracket: Wall mounting bracket/Rack mounting bracket Controller • Remote Control: Standard VCR11 Infrared Remote Control • Touch Panel: Optional CTP18/CP965 Touch Panel Content Sharing • VCH51 Video Conferencing Hub (Optional) – Support HDMI / USB-C input – Support up to 4Kp30 or 1080p60 – 1 x USB 2.0 for WPP30 pairing • Yealink Wireless Presentation Pod WPP30 (Optional) – Support up to 4Kp30 • Apple AirPlay • Miracast • Yealink conference content sharing code • Content sharing via HDMI in NAT and Firewall Traversal • ICE/TURN/STUN • H.460	• NAT (manual/auto mode) • Yealink intelligent firewall traversal Configuration Management • Configuration via web/display/auto provisioning /CTP18/CP965 • Firmware upgrade, reset to factory • Export or import configuration • Export system log Network and Security Features • Wi-Fi: 2.4GHz/5GHz bimodule • Bluetooth: 5.0 • TCP/IP: IPv4&IPv6 • Communication Protocol: H.323/SIP • NAT traversal: – HTTPS Web Page Secure Access – Support API interface signaling, TCP/IP and RS232 dual connection mode – SRTP/TLS/AES encryption – QoS: 802.1p/Q, Diffserv – IEEE 802.1X, LLDP-MED, VLAN – Anti network and protocol attacks – SNTP Automatically synchronizes date and time – Built-in security encryption certificate • Encryption function: SRTP/TLS/H.235/AES 256-bit Physical • Display port: 3 x HDMI out port, supports up to 4K30 • VCH Port: 1 x VCH/LAN (can be configured as ordinary VCH port or internet port) , 2 x Audio port • Content Input Port: 1 x HDMI in Port, supports up to 4K30 • USB Port: 3 x USB-A to connect UVC30 • Network Port: 1 x 10/100/1000Mbps network port (if VCH switches to Internet port, 2 network interfaces are supported) • 3.5 mm line-out: 1 • 3.5 mm line-in: 1 • Power Port: DC 48V • Wall mounting bracket: Standard • Rack mounting bracket: Standard Video Standard and Network Suitability • AH.265, H.264 SVC, H.264 HP, H.264, H.263, H.263+ • Anti 50% video packet loss • Shared content and audio preference strategy	• Bandwidth/protocol/auto adaptive Audio Features • AAC-LD, ARES, Opus, G.722.1C, G.722.1, G.722, G.711(PCMU/PCMA), G.729 • Audio Technology – Yealink Noise Proof Technology – Multi-channel acoustic echo cancellation – Multi-channel dereverberation – Automatic gain control – CNG/PLC/AJB/De-Rerb • Anti 80% audio packet loss Standard Communication Protocol • H.323/SIP • Dual stream protocol: H.239 (H.323) / BFCP (SIP) • FECC: H.224/H.281 • Camera Control Protocol: Sony VISCA, PELCO D/P • H.323 Protocol: H.245, H.225 , H.235, H.241 • Gatekeeper account and SIP account Video Resolution • 4K, 1080P, 720P, 448P, 360P, 4CIF, CIF Other Physical Features • External Yealink Power Adapter: AC 100~240V input and DC 48V/2A Output • USB Output: 5V  0.5A • Power consumption (PSU): – Idle<14W – Normal operating: 14W – MAX: 39W • Dimension (W.D.H): – MeetingEye 500: 315mm x 170mm x 32mm – VCR11 remote control: 190mm x 55mm x 24mm • Operating humidity: 10~95% • Operating temperature: 0~40℃ • Storage temperature: -30~70℃ Package Features • N.W/CTN: 10.5kg • G.W/CTN: 11.2kg • Giftbox size: 455mm x 400mm x 255mm
---	--	---